



WILPINJONG COAL PTY LTD Environment Protection Licence (EPL) 12425

Link to Environment Protection Licence EPL12425

LICENCE MONITORING DATA MONTHLY SUMMARY REPORT

for

1 April 2021 to 30 April 2021





Air Monitoring

Air quality surrounding the Wilpinjong Coal Mine is monitored using:

- 1. tapered element oscillating microbalances (TEOM);
- 2. high volume air samplers (HV); and
- 3. dust deposition gauges (DG).

In terms of the above equipment:

- 1. the TEOM and HVAS measure fine dust particles up to 10 microns in diameter (i.e. PM10); and
- 2. the DG measure the total dust deposited in the gauge during the sample period.

All are influenced by mining as well as non-mining activities in the local area.

The location of the above monitoring equipment in relation to Wilpinjong Coal Mine is shown in **Figures 6** and **8**.

A summary of the monitoring results for the month is provided in **Table 1** and the yearly trends are also shown in **Figures 1** to **3**.

For comparison with **Figures 2** and **3**, **Figure 4** displays the Regional 24Hr PM10 Average. PM10 dust levels for the month have been recorded in Bathurst and Merriwa by NSW EPA.





Table 1 - Air Monitoring

EPL ID No.	Monitoring Point ID.	Pollutant	Unit of Measure	Monitoring Frequency required by EPL	No. of times measured during month	Min. Value	Max. Value	Mean Value	Measurement	Annual Average	Limit	Exceed* (yes/no)	Date Last Sampled	Date Reported
3	DG4	Particulates - TIM	grams per square metre per month	Monthly	1				0.9				23/04/21	18/05/21
4	DG5	Particulates - TIM	grams per square metre per month	Monthly	1				6.2	1.5	4.0	Yes	23/04/21	18/05/21
6	DG8	Particulates - TIM	grams per square metre per month	Monthly	1				0.7				23/04/21	18/05/21
9	DG11	Particulates - TIM	grams per square metre per month	Monthly	1				1.3				23/04/21	18/05/21
17	DG15	Particulates - TIM	grams per square metre per month	Monthly	1				1.0				23/04/21	18/05/21
13	HV1	PM10	micrograms per cubic metre	Every 6 days	5	6.3	18.4	11.9			50	No	27/04/21	18/05/21
19	HV4	PM10	micrograms per cubic metre	Every 6 days	5	8.2	25.9	16.7			50		27/04/21	18/05/21
20	HV5	PM10	micrograms per cubic metre	Every 6 days	5	15.5	31.3	23.2			50		27/04/21	18/05/21
22	TEOM3	PM10	micrograms per cubic metre	Continuous (24 Hr Average)	100.0%	4.7	86.6	15.1			50	Yes		
23	TEOM4	PM10	micrograms per cubic metre	Continuous (24 Hr Average)	100.0%	6.6	139.5	20.5			50			


Notes:

1. Limits specified in the above table are from Development Consent SSD-6764.





Figure 1a. DG Results - 12 Month Trend

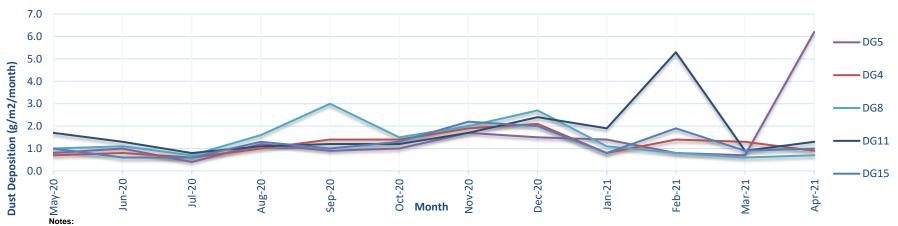

1. Limit of 4 g/m2/month (annual average) applies to DG5 (Wollar Village) - refer Figure 1b.

2. In February 2021, DG11 recorded 5.3g/m² of total insoluble matter. Upon further inspection, less than 5% was attributed to dark particles indicating that the result was not due to mining operations. The majority of the result consisted of organic matter (35%) and ash (65%).

3. In April 2021, DG5 recorded 6.2g/m² of total insoluble matter. The sampler recorded bird droppings as being present in the funnel justifying an organic composition of 50%. It is determined that mining operations did not contribute to this exceedance.

Figure 1b. DG 5 Results - Annual Average


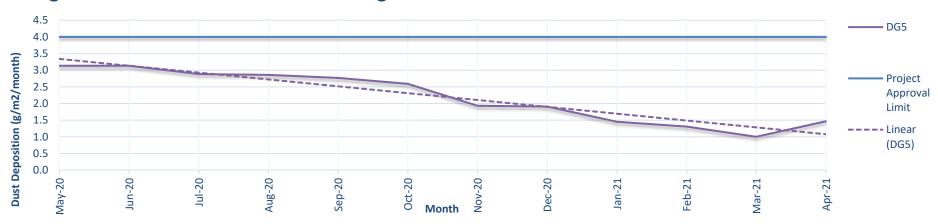






Figure 2. HV (PM10) Results - 12 Month Trend

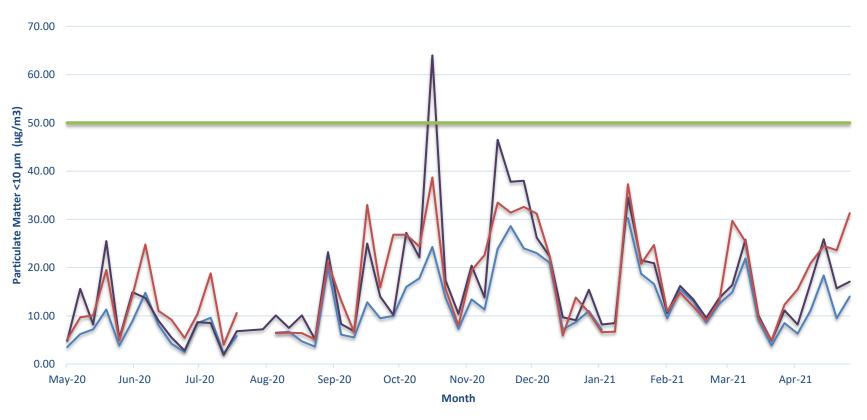


- Limit doesn't apply for extraordinary events such as bushfires, prescribed burning, or dust storms.
 Recorded PM10 dust levels above 50 µg/m³ recorded in October 2020 were caused by regional dust events.
- 3. A power outage prevented a sample from being collected at HV1 on 9th January 2021.
- 4. Power outages prevented samples from being collected at HV1 and HV5 during July 2020.







Figure 3. TEOM (PM10) Results - 12 Month Trend

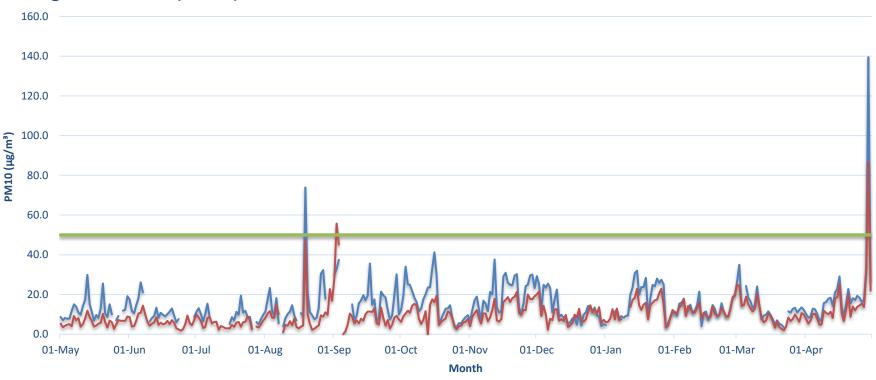


- 1. Limit dosen't apply for extraordinary events such as bushfires, prescribed burning or dust storms
- 2. TEOM 4 (Araluen Rd) influenced by dust from Araluen Road generally during stable atmospheric conditions (i.e. temperature inversions)
- 3. Power outages during June, July and September 2020 and January and March 2021 resulted in periods of no data at TEOM 4.

 4. PM10 data recorded at TEOM 3 between 28 June and 31 July 2020 is invalid due to instrument fault causing inaccurate results. The data is unable to be corrected or adjusted due to the nature of the failure
- 5. The elevated dust levels recorded on 19 August 2020 and 29 April 2021 align with the regional dust events recorded by the Department of Planning, Industry and Environment.

TEOM 4 (Araluen Rd) TEOM 3 (Wollar) 24 hour PM10 Limit (refer Notes)





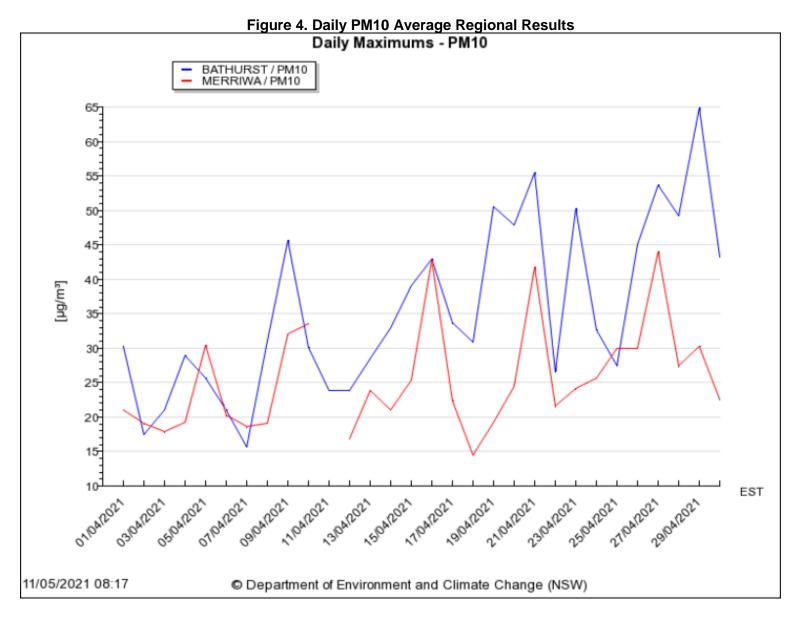





Surface Water Monitoring

Surface water runoff is isolated and diverted around disturbed areas through the construction of water diversion bunds. Runoff from disturbed areas is diverted into on-site water retention dams.

A Reverse Osmosis (RO) Plant treats all water from the retention dams before it is discharged to Wilpinjong Creek. The EPL specifies limits for the quantity and quality of water that may be discharged from the site.

Water Monitoring

EPL ID No.	Monitoring Point ID.	Pollutant	Unit of Measure	Monitoring Frequency required by EPL	No. of times measured during month	Min. Value	Max. Value	Mean Value	Measurement	Limit	Exceed* (yes/no)		Date Reported
24	RO Plant Discharge	Conductivity	microSiemens per centimetre (uS/cm)	Continuous during discharge	100%	1	483	348		500	No		
		Oil and Grease	milligrams per litre (mg/L)	Weekly during any discharge	4	<5	6	<5		10.0	No	30-Apr-2021	18-May-2021
		рН	pH Unit	Continuous during discharge	100%	6.8	8.2	7.2		≥6.5≤8.5	No		
		Total Suspended Solids	milligrams per litre (mg/L)	Weekly during any discharge	4	<1	<1	<1		50	No	30-Apr-2021	18-May-2021
		Volume discharged	megalitres per day	Continuous during discharge	100%	0.680	2.816	2.066		5.0	No		





Noise Monitoring

Environmental noise monitoring ("monitoring") is carried out monthly.

The purpose of the monitoring is to assess whether mining operations are consistent with the objectives of the EPL and the development consent conditions.

In terms of this monitoring, it is undertaken:

- 1. by an independent noise consultant;
- 2. during the night-time; and
- 3. at the sites shown in **Figure 7**.

On pages 10 and 11 of this report are the noise levels and findings from the consultant's report.



Table 4.2: LAeq,15minute GENERATED BY WCP AGAINST PROJECT SPECIFIC CRITERIA – APRIL 2021

Location	Start Date and Time	Wind Speed m/s ¹	Stability Class ¹	Criterion dB	Criterion Applies? ²	WCP L _{Aeq,15min} dB ³	Exceedance 4
N6	20/04/2021 23:52	0.0	G	37	No	30	NA
N14	21/04/2021 00:30	0.7	G	35	No	<25	NA
N15	20/04/2021 23:31	1.5	G	37	No	34	NA
N17	20/04/2021 22:29	0.9	G	38	No	33	NA
N19	20/04/2021 22:01	0.7	G	35	No	<25	NA
N20	21/04/2021 01:17	0.9	G	35	No	<25	NA

Notes:

- 1. Wind speed is sourced from the WCP weather station, stability class is determined based on WCP inversion tower data;
- Noise emission limits apply for all meteorological conditions, except for the following: wind speeds greater than 3 m/s above ground level;
 or stability category F temperature inversions and wind speeds greater than 2 m/s at 10m above ground level; or stability category G
 temperature inversion conditions;
- 3. Site-only $L_{Aeq,15minute}$ attributed to WCP, including modifying factors if applicable; and
- 4. NA in exceedance column means criterion was not applicable due to atmospheric conditions outside those specified in EPL.

Table 4.3: LA1.1minute GENERATED BY WCP AGAINST PROJECT SPECIFIC CRITERIA – APRIL 2021

Location	Start Date and Time	Wind Speed m/s ¹	Stability Class ¹	Criterion dB	Criterion Applies? ²	WCP L _{A1,1min} dB ^s	Exceedance 4
N6	20/04/2021 23:52	0.0	G	45	No	31	NA
N14	21/04/2021 00:30	0.7	G	45	No	27	NA
N15	20/04/2021 23:31	1.5	G	45	No	44	NA
N17	20/04/2021 22:29	0.9	G	45	No	42	NA
N19	20/04/2021 22:01	0.7	G	45	No	<30	NA
N20	21/04/2021 01:17	0.9	G	45	No	31	NA

Notes:

- 1. Wind speed is sourced from the WCP weather station, stability class is determined based on WCP inversion tower data;
- Noise emission limits apply for all meteorological conditions, except for the following: wind speeds greater than 3 m/s above ground level; or stability category F temperature inversions and wind speeds greater than 2 m/s at 10m above ground level; or stability category G temperature inversion conditions;
- 3. Site-only LA1,1minute attributed to WCP; and
- 4. NA in exceedance column means criterion was not applicable due to atmospheric conditions outside those specified in EPL.





6 SUMMARY

Global Acoustics was engaged by Wilpinjong Coal Pty Ltd to conduct a monthly noise survey of operations at WCP, an open cut coal mine located approximately 40 kilometres north east of Mudgee. The purpose of the attended noise monitoring survey is to quantify and describe the acoustic environment around the site and compare results with specified limits.

Attended environmental noise monitoring described in this report was undertaken during the night period of 20/21 April 2021 at six monitoring locations.

Noise levels from WCP complied with relevant noise limits at all monitoring locations during the April 2021 monitoring. Criteria may not always be applicable due to meteorological conditions at the time of monitoring.

Global Acoustics Pty Ltd

Wilpinjong Coal received the report from Global Acoustics Pty Ltd on 13th May 2021.





Blasting

Monitoring is carried out near sensitive locations during blasting activities to determine the vibration in the air (overpressure) and earth (ground vibration). A summary of the results of this monitoring, and the limits specified in the EPL, are shown in **Tables 3** and **4**. **Figures 7 & 8** shows the actual overpressure and vibration levels recorded during the month.

Table 3 – Overpressure Monitoring Results

Location	Month	Month Number of Blasts		Minimum Maximum overpressure (dB(L)) (dB(L))		EPL overpressure Limits (dB(L))	Exceedance (yes/no)	
Approx. 50m west of the Wollar Public School	April	15	77.6	107.4	93.2	115dB (95% blasts) 120dB (100% blasts)	no	

Table 4 – Vibration Monitoring Results

Location	Month	Number of Blasts	Minimum Maximum vibration (mm/sec) (mm/sec)		Mean vibration (mm/sec)	EPL vibration Limits (mm/sec)	Exceedance (yes/no)	
Approx. 50m west of the Wollar Public School	April	15	0.03	4.68	0.42	5 mm/s (95% blasts) 10 mm/s (100% blasts)	no	





Figure 7. Overpressure (dBL) recorded during Month




Date





Figure 8. Vibration (mm/s) recorded during Month

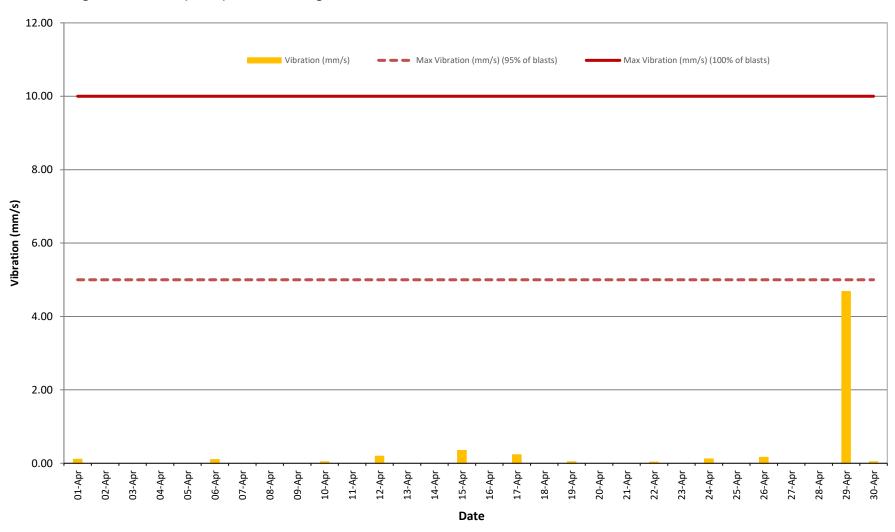





Weather Monitoring

Continuous weather monitoring occurs onsite at the location shown on Figures 5 and 6 (**Meteorological Station**). The Meteorological Station continuously monitors for: rainfall; relative humidity; temperature (i.e. at 2m, 10m & 60m), barometric pressure, wind speed, wind direction and temperature lapse rate.

The temperature lapse rate is a measure of stable atmospheric conditions and is determined by measuring air temperature at two elevations 58m apart (i.e. 2m and 60m from ground level) and extrapolating the temperature difference over 58m to determine the lapse rate per °C/100m.

Table 5 shows the meteorological data recorded during the month.

Table 5 – Monthly Meteorological Data

	Temperature (*C)			(°C)	Humidity (2)					Prevailing Wind				Rain	Bar	Lapse Rate			
Date		2m			10m			60m						Speed		Dir	(==)	(kPa)	(oC/100m)
	Avg	Mis	Max	Avg	Mis	Max	Avg	Mis	Max	Avg	Mis	Max	Avg	Mis	Max	(Deg)			Max
1/04/2021	16.6	9.8	23.5	16.6	10.4	22.6	16.9	11	22	75	48.3	96	1.1	0	3.6	67	0	1022.7	2.5
2/04/2021	18	10.3	24.3	17.9	10.9	23.5	18.1	11.6	22.8	72.9	47.8	96.5	1.8	0	4.3	73	0	1023.8	9.6
3/04/2021	19.2	14.7	24.7	19	15	23.9	19.1	15.8	23.2	71.7	50.1	88.5	1.9	0	3.9	78	0	1021.8	-0.5
4/04/2021	18.8	11.2	27.7	19	11.8	26.8	19.3	12.6	25.5	74.5	41.4	36.4	0.6	0	2.2	329	0	1017.7	9.6
5/04/2021	19.7	12	25.8	19.6	12.6	25.1	19.8	13.6	24.4	71.5	48.9	96	1.5	0	4.2	73	0	1016.4	11.9
6/04/2021	20.7	16.4	25	20.5	17.3	24.5	20.4	18.3	23.5	70	53.1	84.7	3.1	0.8	6.1	88	0	1017.8	-0.2
7/04/2021	20.1	16.4	25.9	20	16.8	24.9	19.9	17.6	24.3	71.7	48.2	87.4	2.4	0	4.7	86	0	1014.8	1.9
8/04/2021	18.4	12.7	25.5	18.5	13.4	24.4	18.9	13.7	23.6	76.5	48	95.9	0.8	0	3.4	67	0	1010.2	4.0
9/04/2021	18.6	11.1	27.5	18.9	11.4	27.1	19.8	12.5	26.3	66.1	25.9	96.5	1.9	0	6.9	269	0	1005.4	8.2
10/04/2021	15.8	11.1	21.4	16	11.8	20.7	16.3	13.2	19.8	59.7	36.2	86	2.1	0	5.7	253	0.4	1006.9	0.2
11/04/2021	11.5	5.7	15.2	11.6	6.9	14.4	11.7	8.6	13.6	54.9	32.2	84.7	3	0.2	6.8	242	0	1012.8	0.5
12/04/2021	11.2	3.3	20	11.4	3.9	13.4	11.8	5.2	18.3	53.9	24.3	82.3	0.9	0	3.1	284	0	1018	2.5
13/04/2021	11.7	1.8	23	12.1	2.6	22.5	12.8	3.8	21.3	63	25.2	34.6	0.4	0	3.1	11	0	1019.4	6.0
14/04/2021	15.3	4	24.8	15.5	4.9	24.2	16.3	6.5	23.4	54.5	22.4	93.4	2.2	0	6.5	276	0	1015.6	3.5
15/04/2021	16.9	6.8	24.5	17.1	8	23.6	17.7	11	22.9	51.6	31.9	88.4	1.8	0	6.2	249	0	1014.3	1.8
16/04/2021	16.4	11.3	19.9	16.3	11.5	19.1	16.1	12.8	18.5	54.9	37	74.7	1.8	0	4.2	77	0	1018.5	0.2
17/04/2021	13.6	9.1	16.4	13.6	9.4	15.7	13.3	9.9	14.8	81.7	69.9	94.2	1.9	0	4.4	73	1.4	1021.6	-0.5
18/04/2021	12.5	7.5	20.7	12.6	7.8	20.4	12.7	8.2	19.3	79.5	40.6	97.5	0.4	0	1.9	328	0	1020	-0.2
19/04/2021	12	3.7	22	12.3	4.4	21.4	13.3	5.8	20.6	66.3	23	97.4	1	0	4.3	276	0	1017.1	-0.5
20/04/2021	12.4	2.5	21.3	12.7	3.2	20.6	13.8	5.6	19.8	61	29.9	93.7	1.8	0	5.3	279	0	1014.4	0.5
21/04/2021	13	6.8	18.9	13.2	8	17.8	13.5	9.9	17.1	52.7	31.1	76.5	2	0	4.9	250	0	1012.9	-0.5
22/04/2021	9.7	1.4	17	10	2.5	16.2	10.4	4.3	15.4	59.3	29.4	95.3	1.9	0	5.5	257	0	1014.8	-0.5
23/04/2021	10.7	0.6	19.4	10.8	1.3	18.7	11.5	3.1	17.9	61.8	36.1	92.7	1.4	0	5.2	245	0	1018.4	0.2
24/04/2021	12.1	3	21.1	12.2	3.4	20.1	12.9	4.8	19.4	62.6	30.5	94.2	0.9	0	4.8	269	0	1020.9	1.9
25/04/2021	11.6	2.9	21.6	12	3.9	20.9	13.2	6.1	19.6	68.5	36	95.1	0.3	0	2	22	0	1022.2	2.8
26/04/2021	12	4	21.4	12.3	4.9	20.7	13.1	6.4	19.8	73.5	37.7	95.5	0.4	0	2.4	36	0	1023.7	4.7
27/04/2021	12.4	4	21.9	12.8	4.8	20.9	13.8	6.2	20.2	73.2	38	36.5	0.7	0	3.6	63	0	1024.8	7.5
28/04/2021	12.1	5.5	21.2	12.5	6	19.9	13.8	7.8	19.3	79.9	45	36.6	0.6	0	3.3	59	0	1024.3	7.7
29/04/2021	12.8	4.7	22.9	13.2	5.3	21.9	14.5	6.9	20.9	75.3	37.4	97.2	0.5	0	2.6	74	0	1023	6.8
30/04/2021	13.4	5	21.8	13.8	6.1	21.1	14.6	7.7	20.4	75.4	39.8	97	1	0	3.4	73	0	1025.9	4.9





Figure 6 – Air (Dust) Monitoring Locations

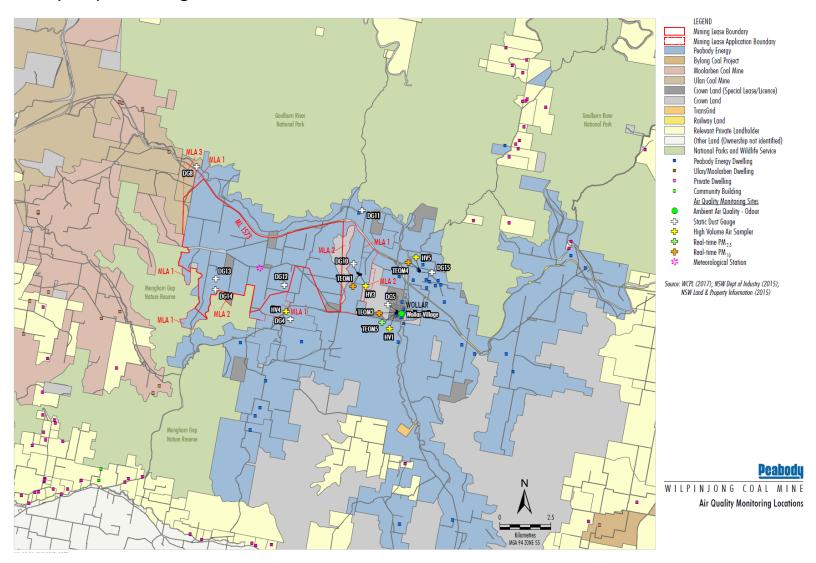






Figure 7 – Attended Noise Monitoring Locations

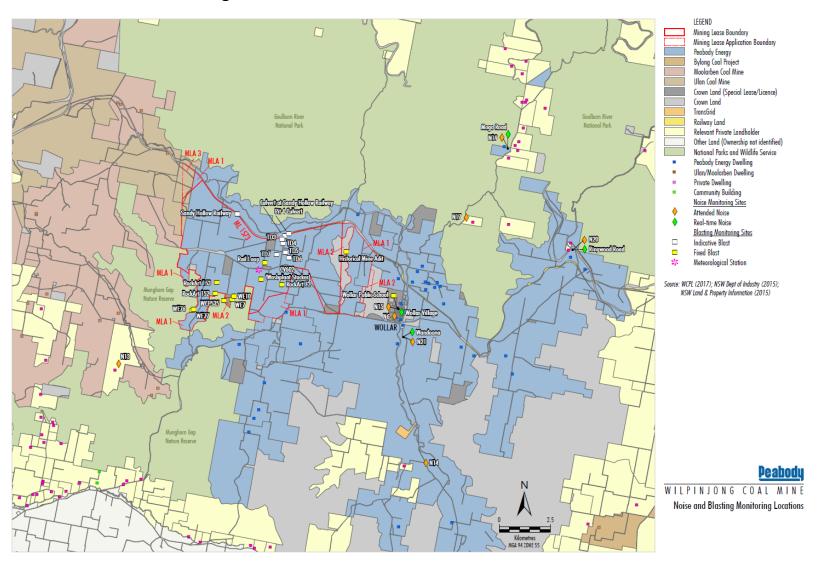






Figure 8 - Wollar Village Environmental Monitoring Sites

